



GLOBAL GARDEN PRODUCTS

For further information please contact GGP order desk

orderdesk@ggp-group.com

fax: +46 - 140.67.815

Your GGP stockist















Inspired solutions for garden living.

leading garden equipment company, accessories and spare parts for all these product categories.

brands are well known and trusted by both consumers and professional users around the world.

Sales. The company is focusing on alternatives to standard approaches, but also after sales support, training

part of the vast range of accessories and spare parts available at GGP and we strongly recommend to use them for all our brands and products.









GGP brands in order to safeguard warranty claims and the machine's life and value.

CHAINSAWS

TRIMMERS & BRUSHCUTTERS


SPARK PLUGS

16 LUBRICANTS

18 SAFETY EQUIPMENT

SERVICE EQUIPMENT

26 SPECIAL TOOLS

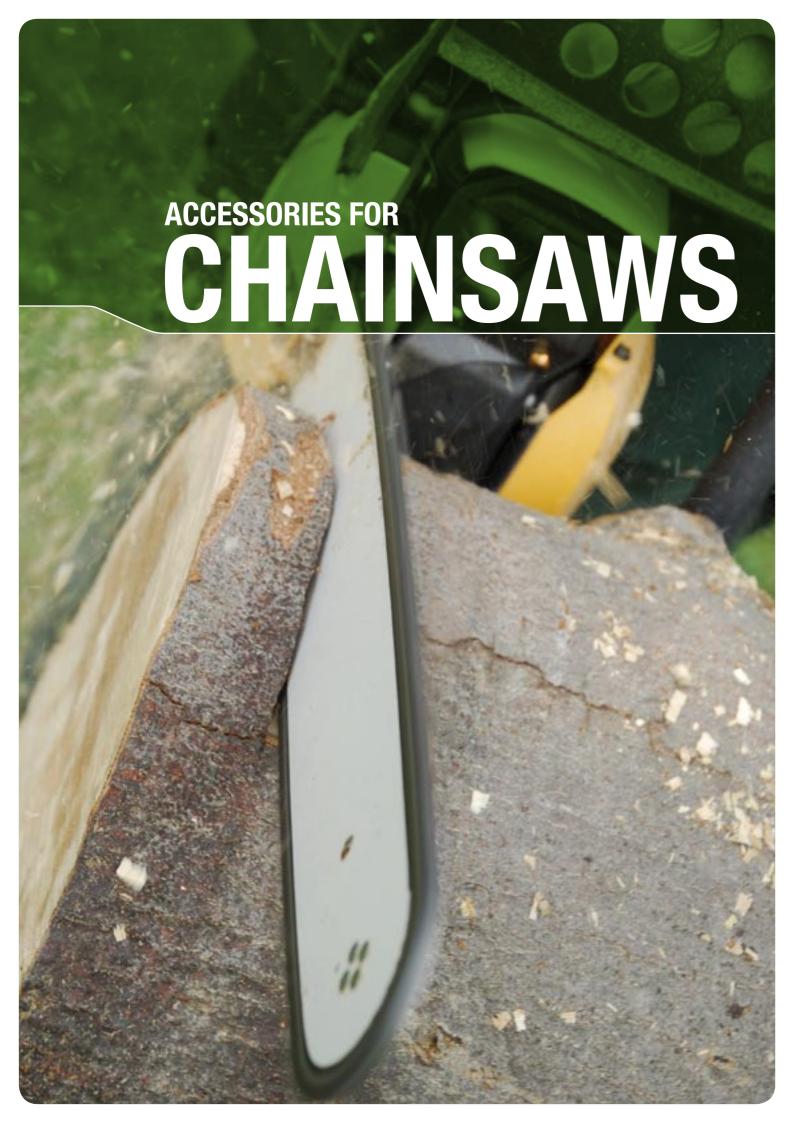



Lo-pro-UltralinkHigh-speed and smooth cutting chain with excellent anti-vibration and shock resistance qualities. Suitable for electric and low-powered chain saws.

Micro-Lite Ultralink

High-speed micro-chisel cutting chain, developed for the requirements of the actual medium-powered and highrevolutioned light chain saws. It has excellent anti-vibration features, as well as a very good lubrication. Long life product.

Semi-chisel Ultralink

Ideal for universal use on all type of wood, this is the most popular round-hedged teeth chain, as it extremely easy to shapen. It offers superb quality cutting.

Chisel Ultralink

Almost exclusively destined to the professional sector which requires a hardwearing chain able to work even in the worst adverse conditions.



Micro-chisel

This kind of chain combines the perfomance of chisel chain with the easy maintenance and durability of round cutters chains. It is ideal for both professional and semi-professional users.



Semi-chisel

This chain is the best compromise between efficiency-high speed and life of the product; ideal for any type of wood. Its tapered-outlined teeth are comparatively easy to use and tolerate little sharpening mistakes.



Chisel

It is one of the most requested chains and mainly destined for the professional sector. Its square-edged teeth offer excellent performances in cutting down particularly hard wood.

Code	Pitch per thickness	Tooth	Links	Length: m/foot	Ref oregon
4115400	3/8".050"/1,3 mm	Lo-pro	1640	30/100	91 V S
4115401	3/8".050"/1,3 mm	Lo-pro-Ultralink	1640	30/100	91VG
4115410	325".050"/1,3 mm	Semi-chisel Ultralink	1848	30/100	95VP
4115420	325".050"/1,3 mm	Semi-chisel Ultralink	1848	30/100	20BP
4115430	325".058"/1,5 mm	Semi-chisel Ultralink	1848	30/100	21BP
4115435	325".058"/1,5 mm	Chisel Ultralink	1848	30/100	21LP
4115440	3/8".050"/1,3 mm	Semi-chisel Ultralink	1640	30/100	72DP
4115450	3/8".058"/1,5 mm	Semi-chisel Ultralink	1640	30/100	73DP
4115460	3/8".063"/1,6 mm	Semi-chisel Ultralink	1640	30/100	75DP
4115445	3/8".050"/1,3 mm	Chisel Ultralink	1640	30/100	72LP
4115455	3/8".058"/1,5 mm	Chisel Ultralink	1640	30/100	73LP
4115465	3/8".063"/1,6 mm	Chisel Ultralink	1640	30/100	75LP
4115470	404".063"/1,6 mm	Chipper	1484	30/100	59AC
4115480	1/4" 0.50"/1,3 mm	Micro-chisel	600	7,5/25	25AP



Joining kit





Code	Ref Oregon
B3134700	91VS - 91VG
B3134701	20BP - 21BP - 21LP
B3134702	72DP - 73DP
B3134703	72LP - 73LP - 75DP - 75LP
B3134704	59AC
B3134705	95VP



Blister loops

The choice of the right chain type is fundamental in order to optimize the chainsaw operation. Ideal for hobby, agricultural and forestal work, our chains always guarantee safety and the maximum cutting performance, thanks to excellent resistance and lubrication characterictics; they are easy to sharp and have guide on the bar.

Code	Pitch per thickness	Tooth	Links	Bar	Ref oregon	Model
4113700	3/8".050"/1,3 mm	Lo-pro-Ultralink	44	12"	91 V G	PR350
4113701	3/8".050"/1,3 mm	Lo-pro-Ultralink	49	14"	91VG	ES150/PS350
4113702	3/8".050"/1,3 mm	Lo-pro-Ultralink	50	14"	91VG	Elettra/Energy/P361/P371/P391/P411
4113703	3/8".050"/1,3 mm	Lo-pro-Ultralink	52	14"	91VG	
4113704	3/8".050"/1,3 mm	Lo-pro-Ultralink	54	16"	91VG	ES150/PS350
4113705	3/8".050"/1,3 mm	Lo-pro-Ultralink	56	16"	91VG	Elettra/Energy/P361/P391/P371/P411
4113706	3/8".050"/1,3 mm	Lo-pro-Ultralink	57	16"	91VG	PS338
4113708	3/8".050"/1.3 mm	Lo-pro-Ultralink	53	14"	91VG	PS338
4113709	3/8".050"/1.3 mm	Lo-pro-Ultralink	40	10"	91 V G	PR270
4113710	325".050"/1,3 mm	Micro-lite Ultralink	56	13"	95VP	P371/P411
4113711	325".050"/1,3 mm	Micro-lite Ultralink	64	16"	95VP	P371/P411
4113712	325".050"/1,3 mm	Micro-lite Ultralink	66	16"	95VP	P420/P430/P440/P470/P480
4113713	325".050"/1,3 mm	Micro-lite Ultralink	72	18"	95VP	P430/P440/P470/P480
4113720	325".058"/1,5 mm	Semi-chisel Ultralink	56	13"	21BP	P430/P440/P460/P470/P480/P510
4113721	325".058"/1,5 mm	Semi-chisel Ultralink	66	16"	21BP	P460/P510
4113722	325".058"/1,5 mm	Semi-chisel Ultralink	72	18"	21BP	P450/P460/P500/P510
4113723	325".058"/1,5 mm	Semi-chisel Ultralink	78	20"	21BP	P500/P510
4113730	3/8".058"/1,5 mm	Chisel Ultralink	68	20"	73LP	P660/P760 (18")
4113731	3/8".058"/1,5 mm	Chisel Ultralink	72	20"	73LP	P760 (20")
4113740	3/8".058"/1,5 mm	Semi-chisel Ultralink	68	20"	73DP	P610/P660/P760(18")
4113741	3/8".058"/1,5 mm	Semi-chisel Ultralink	72	20"	73DP	P680/P760(20")
4113742	3/8" .058"/1.5 mm	Semi-chisel Ultralink	66	18"	73DP	P680
4113750	3/8".063"/1,6 mm	Chisel Ultralink	84	24"	75LP	P760
4113760	1/4" .050"/1,3 mm	Chisel Ultralink	60	10"	91 V G	PR270C



Blister loops

Code	Pitch per thickness	Tooth	Links	Bar	Ref oregon
B4113702	3/8".050"/1,3 mm	Lo-pro-Ultralink	50	14"	91 V G
B4113705	3/8".050"/1,3 mm	Lo-pro-Ultralink	56	16"	91VG
B4113711	325".050"/1,3 mm	Micro-lite Ultralink	64	16"	95VP
B4113721	325".058"/1,5 mm	Semi-chisel Ultralink	66	16"	21BP
B4113722	325".058"/1,5 mm	Semi-chisel Ultralink	72	18"	21BP



All "Consumer" bars have sprockets and a multi-layer structure, for D. I. Y. jobs.

• Microlite / Pro am Pro-lite

Microlite / Pro am / Pro-lite bars have a sprocket tip and are suitable for agricultural use.

Power match

"Prof." bars have professional features with inserted

▲ Laser type
"Prof. laser type" bars have professional features and a stellite point.



Code	Length	Description	Туре	Model
4112610	Bar 10"= 25 cm	3/8" - 0,42" - 1,1 mm	Consumer	Pruner Accessories
23900300/0	Bar 10" = 25 cm	3/8" mini - 0,50" - 1.3 mm	Micro Lite	PR270
23900301/0	Bar 10" Carving = 25 cm	1/4 - 0,50" 1.3 mm	Laser Type	PR270C
4112270	Bar 12"= 30 cm	3/8" mini - 0,50"- 1,3 mm	Consumer	PR350
23900109/0	Bar 13"= 33 cm	325" - 0,50" - 1,3 mm	Micro Lite - Pro Am	P371/411
23900103/0	Bar 13"= 33 cm	325" - 0,50" - 1,3 mm	Pro-Lite	P440/480
4112660	Bar 13"= 33 cm	325" - 0,58" - 1,5 mm	Pro-Lite	P440/P460/P480/P510
23900110/0	Bar 14"= 35 cm	3/8" mini - 0,50"- 1,3 mm	Consumer	Elettra/Energy/P361/P371/P391/P411
6980536	Bar 14" = 35 cm	3/8" mini - 0,50" - 1.3 mm	Consumer	ES150
6980692	Bar 14" = 35 cm	3/8" mini - 0,50" - 1.3 mm	Consumer	PS350
6981439	Bar 14" = 35 cm	3/8" mini - 0,50" - 1.3 mm	Consumer	PS338
23900111/0	Bar 16"= 40 cm	3/8" mini - 0,50"- 1,3 mm	Consumer	Elettra/Energy/P361/P371/P391/P41
6980694	Bar 16"= 40 cm	3/8" mini - 0,50"- 1,3 mm	Consumer	ES150/PS350
6981440	Bar 16"= 40 cm	3/8" mini - 0,50"- 1,3 mm	Consumer	PS338
23900107/0	Bar 16"= 40 cm	325" - 0,50" - 1,3 mm	Micro Lite - Pro Am	P411
23900302/0	Bar 16"= 40 cm	325" - 0,50" - 1,3 mm	Pro-Lite	P420
23900100/0	Bar 16"= 40 cm	325" - 0,50" - 1,3 mm	Pro-Lite	P430/P440/P470/P480
4112450	Bar 16"= 40 cm	325" - 0,58" - 1,5 mm	Pro-Lite	P450/P460/P500/P510
23900101/0	Bar 18"= 45 cm	325" - 0,50" - 1,3 mm	Pro-Lite	P430/P440/P470/P480
4112490	Bar 18"= 45 cm	325" - 0,58" - 1,5 mm	Pro-Lite	P450/P460/P500/P510
4112640	Bar 20"= 50 cm	325" - 0,58" - 1,5 mm	Pro-Lite	P500/P510
4112430	Bar 18"= 45 cm	3/8" - 0,58"- 1,5 mm	Laser-Type	P760
6995316	Bar 18"= 45 cm	3/8" - 0,58"- 1,5 mm	Pro-Lite	P680
4112190	Bar 20"= 50 cm	3/8" - 0,58"/1,5 mm	Pro-Lite	P650/P660
6995164	Bar 20"= 50 cm	3/8" - 0,58"/1,5 mm	Pro-Lite	P680
4112390	Bar 20"= 50 cm	3/8" - 0,58"/1,5 mm	Power Match	P760
4112540	Bar 22"= 55 cm	3/8" - 0,58"/1,5 mm	Laser-Type	P760
4112460	Bar 24" = 60 cm	3/8" - 0,63"/1,6 mm	Laser Type	P760











Hobby Tap&Go trimmer head



Code	Description	Pcs per pack
6980120	Tap&Go Trimmer head JF	5

Hobby Tap&Go GGP



Code	Description	Pcs per pack
23155002/1	M 8 x 1,25 sx male (TR1000)	5
23155001/1	M 10 x 1,25 dx female	5

Profil Tap&Go



Code	Description	Pcs per pack
4353000	M 8 x 1,25 sx male	5

Tap&Go




Code	Description	Pcs per pack
23155000/0	M 10 x 1,25 sx female	5
4353240/1	M 8 x 1,25 sx male	5

Multi-edged head Profi "Spol P.8"

Professional 8 - threaded nylon head, particularly suitable for medium and large-powered brushcutters. Aluminium body and nylon head having square-sectioned copolymer thread, 3,0 mm diameter.

Multi-edged head Profi "Spol P.8"

Professional 8 - threaded nylon head, particularly suitable for medium and large-powered brushcutters. Aluminium body and nylon head having square-sectioned copolymer thread, 3,0 mm diameter.

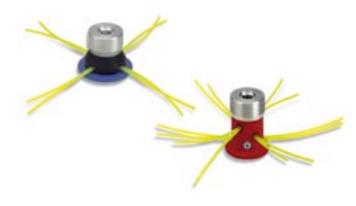

Code	Description	Pcs per pack
6031078	Profi Spol P.8	5
6031080	Spol F8	5
6031079	Spol 12	5



Teeth blade SKS5

Tempered steel disk for grass cutting.



Code	Description	Pcs per pack
6031110	Ø 255-25,4 dia hole 1,5 mm thick	5
6031114	Ø 300-25,4 dia hole 1,5 mm thick	5
6031116	Ø 255-25,4 dia hole 2,5 mm thick	5
6031117	Ø 300-25,4 dia hole 2,5 mm thick	5
6031118	Ø 320-25,4 dia hole 2,5 mm thick	5

Teeth blade SKS5

Tempered steel disk for grass cutting.



Code	Description	Pcs per pack
6031172	Ø 255-25,4 dia hole 1,4 mm thick	5

Teeth blade

Tempered steel disk for cutting medium to short tangled grass with evenly distributed vegetation on flat areas. Easily sharpened with a flat file.



Code	Description	Pcs per pack
6031012	Ø 255-25,4 dia hole 1,4 mm thick	5

Saw blade

Circular tempered steel disk with trapezoidal teeth, ideal for cutting shrub wood, cane, underwood and knotty brushwood.



Code	Description	Pcs per pack
4611900	Ø 230-25,4 dia hole 1,4 mm thick	5
4611890/1	Ø 255-25,4 dia hole 1,4 mm thick	5

Profi - teeth blade

Professional tempered steel disk, specific for thinning and cutting brush-wood, underwood, tough grass and thick vegetation and suitable for thick thorny hedges. Easily sharpened with a flat file. For high power brushcutters.



Code	Description	Pcs per pack
6031173	Ø 255-25,4 dia hole 2,5 mm thick	5
6031174	Ø 300-25,4 dia hole 2,5 mm thick	5
0001174	0 000 20,4 dia 11010 2,0 min dinok	·

Teeth blade

Tempered steel disk for cutting thick grass with hardy, tangled vegetation, especially effective on flat areas. Easily sharpened with a flat file.



Code	Description	Pcs per pack
6031132	Ø 230-25,4 dia hole 1,4 mm thick	5
4611880	Ø 255-25,4 dia hole 1,4 mm thick	5

Profi 24 - Teeth blade

Professional tempered steel disk with chisel teeth for cutting wood, shrub wood, bushes, underwood. Particularly suitable for medium to large capacity brushcutters. Easily sharpened with a 7/32" (5.6 mm) round file.



Code	Description	Pcs per pack
6031185	Ø 255-25,4 dia hole 1,8 mm thick	5

Nylon disk

Nylon disk ideal to cut on rocks, curbs and small walls.



Code	Description	Pcs per pack
6031023	Two-toothed Ø 255-25,4	5
6031024	Three-toothed Ø 255-25,4	5
6031025	Four-toothed Ø 255-25,4	5



SHOULDER STRAPS AND GUARD

Round line

Hard-wearing and flexibility make this thread suitable for all types of cutting in any conditions. It guarantees the best performance for all types of brush cutters. Available in bright red colour.



1	9	Va.	3	-
L	ß			
V	L	3		7
8	e			2
77	٠,			

Code	Description	Pcs per pack
6031410/2	Blister 35 m Ø 1,6 mm	10
6031416/2	Blister 23 m Ø 2,0 mm	10
6031420/2	Blister 17 m Ø 2,4 mm	10
6031430/1	Blister 15 m Ø 3,0 mm	10
6031440/1	Blister 12 m Ø 3,3 mm	10
6031450/1	Donut 87 m Ø 2,4 mm	10
6031460/1	Donut 56 m Ø 3,0 mm	10
6031470/1	Donut 48 m Ø 3,3 mm	10

Square line

Square section (4-points) thread, extremely hard wearing due to its mechanical resistance and flexibility. Suitable for all types of cutting in any conditions. Available in grey colour.



Description	Pcs per pack
Blister 20 m Ø 2,7 mm	10
Blister 15 m Ø 3,0 mm	10
Blister 12 m Ø 3,3 mm	10
Donut 67 m Ø 2,7 mm	10
Donut 54 m Ø 3,0 mm	10
Donut 45 m Ø 3,3 mm	10
	Blister 20 m Ø 2,7 mm Blister 15 m Ø 3,0 mm Blister 12 m Ø 3,3 mm Donut 67 m Ø 2,7 mm Donut 54 m Ø 3,0 mm

Strap with snap-hook

Hobby adjustable strap for small powered trimmers and



Code	Description	Pcs per pack
4253420	Hobby strap for mono brushcutters	1
4253460	Prof. strap for mono brushcutters	1

Duplex straps with prof. snap-hook

Professional strap with double harness and automatic rapid release. Padded shoulders and hip pad, extremely comfortable.



Code	Description	Pcs per pack
4253440	Prof. strap for duplex brushcutters	1

Round and square line 5 LB spool



Code	Description	Pcs per pack
6031590/1	Round spool 437 m Ø 2,40 mm	6
6031600/1	Round spool 280 m Ø 3,00 mm	6
6031610/1	Round spool 237 m Ø 3,30 mm	6
6031971/1	Round spool 336 m Ø 2,70 mm	6
6031972/1	Round spool 270 m Ø 3,00 mm	6
6031973/1	Round spool 227 m Ø 3,30 mm	6

Helicoidal line blister

The helicoidal section determines a particular aerodynamic rotation speed of the wire, reducing the noise level.



Code	Description	Pcs per pack
6032000/1	Blister 15 m Ø 2,0 mm	10
6032010/1	Blister 15 m Ø 2,40 mm	10
6032020/1	Donut 119 m Ø 2,40 mm	10

Cutting device guard

Large nylon guard, hard-wearing and highly protective.


Designed in compliance with safety standards. An additional guard can be clipped on, incorporating a line cutting blade for nylon line trimmer heads.

Code	Description	Pcs per pack
8563571	Universal Ø 24-26 mm	1
8563572	Universal Ø 28 mm	1







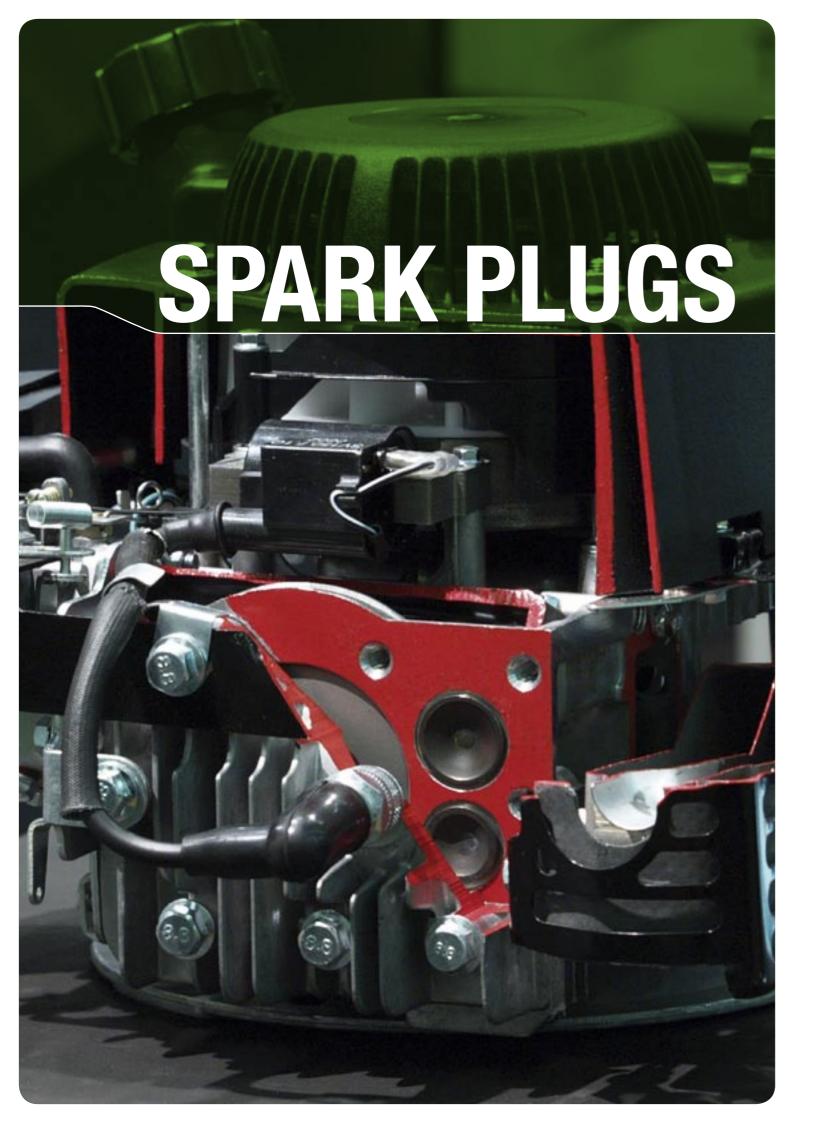

Spark plug champ

Spark plug with exposed electrode for chainsaws and brushcutters. 19 mm hex. Short thread, removable cap.

Code	Description	Pcs per pack
3210022	CJ7Y E. P.	10
3210024	RCJ7Y with anti-interference resistor	10
3210382	CJ8	10
3210062	J17LM lawnmowers	10
3210060	RJ19LM with anti-interference resistor	10
23051000/0	RZ7C	10



Bosch profi chainsaws and brushcutters

Spark plug with anti-interference resistor and exposed electrode for chainsaws and brushcutters - 19 mm hexagon. Short thread, removable cap.

Code	Description	Pcs per pack
3210385	WSR6F with anti-interference resistor	10
3210386	WSR6F with anti-interference resistor	10




Spark plug champ

Semi-professional spark plug with exposed electrode for chainsaws and brushcutters, in packs of 100 pieces, 19 mm hexagon, short thread.

Code	Description	Pcs per pack
3210384	KLGFSC70 (single box)	12
3210380	KLGFSC70 (SS)	100



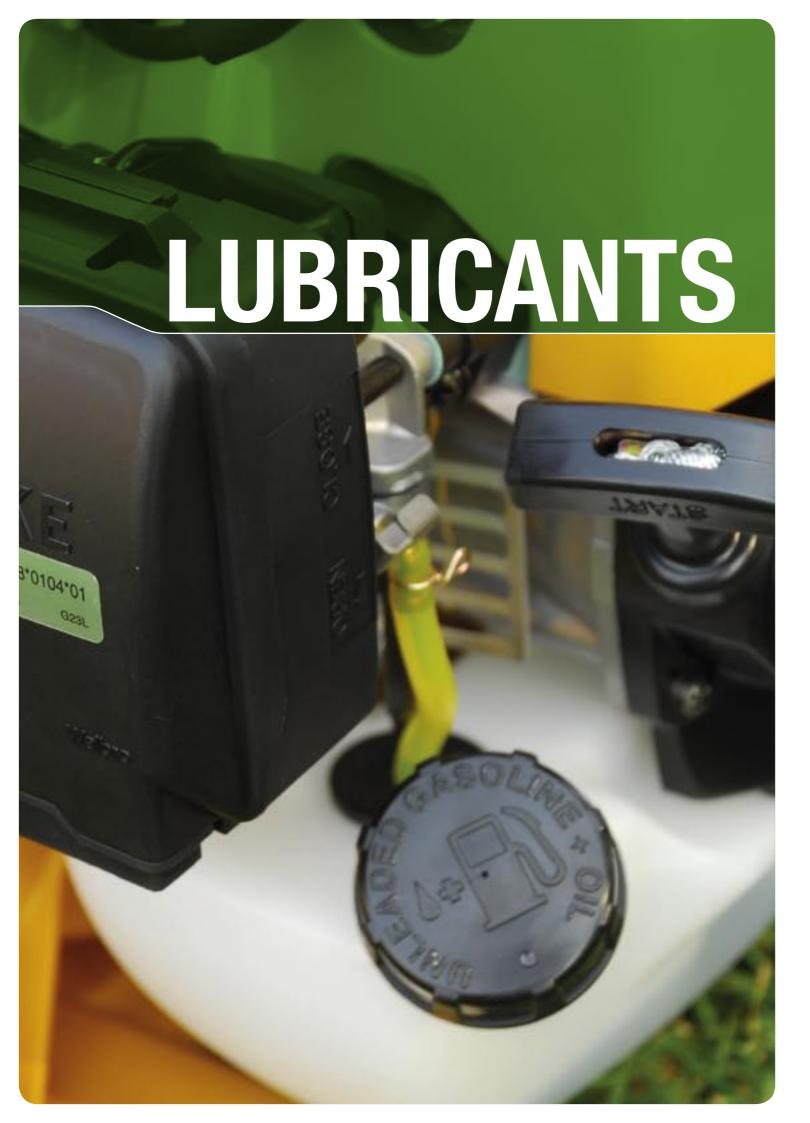

2-stroke Oil 2%

Special oil with a formula comprising an exclusively synthetic base and a special pack of ash-free additive, for high quality lubrication. New high performance, high speed formula for two-stroke engines. Does not cause scaling. May also be used in minimum part (2%) (1:50) with lead-free petrol.



Code	Description	Pcs per pack
5600290/1	100 ml Small Bottle	25
5600300/1	1 - litre Bottle	24

2-stroke Oil 2%

Mineral-based protective oil with special additives for excellent viscosity, lubrication and chain protection. None of the ingredients are considered dangerous to health, in compliance with CE Directive 67/548 and subsequent modifications.



Code	Description	Pcs per pack
5600260/1	1 - litre Bottle	30
5600310/1	5 - litre Bottle	6

4-stroke Oil 4-stroke oil 0,6 litre lawnmowers

Mineral oil 10W-30, with special additive that allows high detergent power. Very good for cold start.

Mineral oil with special additives, against wearing, corrosion, oxidation. The high percentage of anticorrosive additive allows long life for the lawnmower's engine, above all when the machine is not used.



Code	Description	Pcs per pack
5600320	100 ml Bottle	25
5600270/1	600 ml Bottle	24

Grease

Main characteristics: resistance to high temperatures, mechanical stability even under vibrations, waterproof, and anticorrosive quality.





Code	Description	Pcs per pack
8153870/1	125 gr Tube GL1	24
8153880/1	1 - litre Bottle GL 200	30







Hobby gardening gloves

Cotton fabric gloves with plastic dotted palms, thumb and back of index finger, ribbed cuffs. String colour with black dots. Comply with EN 420.



Code	Description	Pcs per pack
9959910	Hobby gloves	5

Multiporpose "farmer" gloves

'Dockers' gloves in full grain pigskin with stiffened palms. Back and cuff in striped cotton fabric. Comply with CE EN 388 (levels 3,1,0,1) and EN 420 (5).



Code	Description	Pcs per pack
9959913	Farmer gloves	5

Safety trunk gloves

Grain anticutting gloves with 7 cm grain leather cuff with wrist tightening band. Anticutting protection on the back side and on the upper part of the cuff. Conform to standard EN 381/4/7, EN 388. Category 3123 class 1.



Code	Description	Pcs per pac
9959918	Anticutting gloves L/XL	1

Forest helmet with mesh visor

Helmet for forestry use. Orange shell in high density polyethylene, anti UV treated. Fabric strapping, foam front piece, plastic head band. Mesh visor with metal border, noise protection ear muffs fitted on lift-up supports. Complies with CE EN 397.



Code	Description	Pcs per pack
9959780	Forest Helmet with mesh visor	1
3333100	i diest liciliet with licesh visor	•

GLOBAL GARDEN PRODUCTS

Poliycarbonate visor

For a greater operator's safety. Adjustable, non-misting. Foam forehead band. CE approved, complies with EN 166 B, which provides for protection to industrial use against particles at high speed and medium energy of impact.



Code	Description	Pcs per pack
9959911	Polycarhonate visor	5

Mesh visor

For maximum safety. Adjustable visor in coated aluminium mesh. Hard-wearing, practical, light. CE approved, complies with EN 1731, which provides for protection against mechanical and technical risks



Code	Description	Pcs per pack
9959912	Mesh visor	5

Safety goggles

PVC goggles, soft, anti-misting with indirect ventilation. Polycarbonate screen, adjustable elastic strap, universal bridge. Comply with EN 166.



Code	Description	Pcs per pack
9959905	Googles	5

"Panorama" goggles

Nylon bow goggles, polycarbonate panoramic screen, wide visual field with integrated guards sideways. Comply with EN 166.



Code	Description	Pcs per pack
9959900	"Panorama" googles	5

Poliycarbonate - mesh visor "profi 2"

CE approved, complies with EN 1731B, which provides for resistance against particles at high speed.

These characteristics together with its lightweight, functional capacity and ergonomic features deriving from its particular shape/structure (transparent plate for eyes' level in order to have always good visibility, protective mesh for the nose-mouth level in order to avoid misting), make it a professional tool particularly fit for brushcutters' users.



Code	Description	Pcs per pack
9959888	Adjustable Prof. visor	5

Polycarbonate mesh visor with adjustable cap profi

Professional visor with adjustable cap and polycarbonate, transparent, anti-misting reclining protection. CE approved, complies with EN 166 B. Optic class 1 and mechanical resistance B.



Code	Description	Pcs per pack
9959300	Profi polycarbonate visor with cap	5
9959301	Profi mesh visor with cap	5

Polycarbonate visor with muffles

Professional protection visor made of polycarbonate, according to the CE standard EN 166, optical class 1, mechanical resistance B, anti-misting. Double adjustable. Also included adjustable ear protectors, conforming to CE standard EN 532-1.



Description	Pcs per pack
Deliveration of vices and car muffs	-
	Polycarbonate visor and ear muffs

Noise -protection ear muffles

For greater working comfort and safety. Pads in heavy-duty polystyrene, synthetic padding, adjustable height by means of pins on the headband. Comply with CE EN 352.



Code	Description	Pcs per pack
9959782	Noise protection ear muffles	5









Round files packs

The quality of the steel and a special treatment make round files ideal for rapid, accurate and easy chain filing.





Flat lines

Flat file for filing depth guides on chainsaw chains and for filing the steel blades on brushcutters.

Handle for files

Universal for all our round and flat files.



Code	Description	Pcs per pack
4153520	Round files 5/32" Ø 4 mm (3/8" mini)	12
4153530	Round files 3/16" Ø 4,8 mm (325")	12
4153540	Round files 13/64" Ø 5,2 mm (3/8")	12
4153550	Round files 7/32" Ø 5,6 mm (404")	12
3670130	Flat file	12
4560130	Handle for file	10



SERVICE EQUIPMENT

Greasing syringe

Standard accessory for lubrication. Supplied with chainsaws and





Spark plug wrenches

Standard 13-19 mm spark plug wrenches with combined screwdriver.

Chainsaw bar covers grey

Essential for your safety when transporting chainsaws.



Code	Description	Pcs per pack
4181297	30 cm	5
4181307	40 cm	5
4181497	50 cm	5

Starter cord coil

The quality and strength of original spare parts.



Code	Description	Pcs per pack
5362290	100 m - Ø 3.0 m	1
5362300/1	100 m - Ø 3.5 m	1
5362310	100 m - Ø 4.0 m	1
5362320/1	100 m - Ø 5.0 m	1

Torx wrench

T27 Torx wrench with handle. For use on chainsaws and brushcutters.



Code	Description	Pcs per pack
4253340	Standard greasing syringe	5
4180620	Short 13-19 Spark plug wrenches	10
4180610	Long 13-19 Spark plug wrenches	10
4181030	Torx wrench with handle	5
23070004/0	Torx wrench	5

Dual purpose can

Folding metal stand with chainsaw rest. It can sustain stocks of considerable diameter.



Code	Description	Pcs per pack
9959818	Dual purpose Can	4
9959908	Hobby Can	4

Saw bench for log cutting


For greater working comfort and safety. Pads in heavy-duty polystyrene, synthetic padding, adjustable height by means of pins on the headband. Comply with CE EN 352.



Code	Description	Pcs per pack
9959828	Log-cutting Stand	1





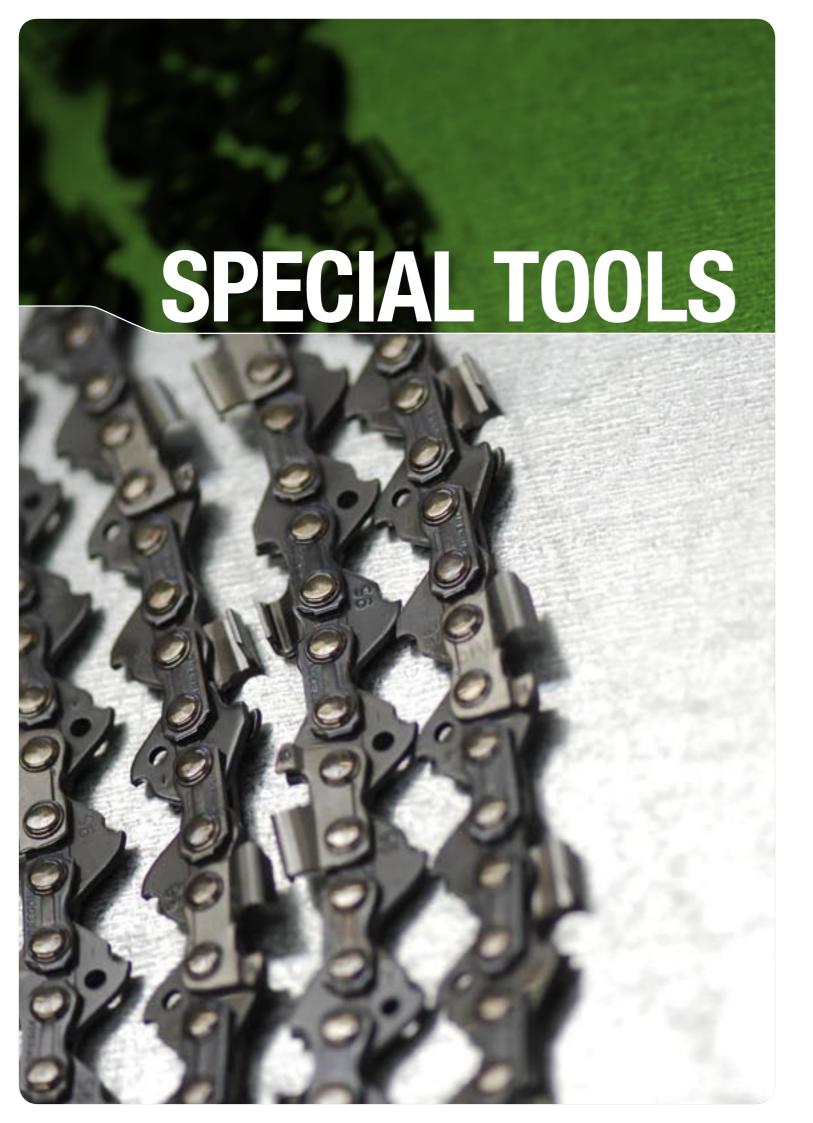






Code	Description	Pcs per pack
4180212	Profi electric grinder	1
4180740	Grinding wheels Ø 145 x 22 x 3,2	1
4180220	Grinding wheels Ø 145 x 22 x 4,5	1

"Master" electric grinder



Code	Description	Pcs per pack
4180215	"Master" grinder	1
4180211	Grinding wheels Ø 105 x 22 x 4,5	1

Chain breaker

Heat-treated aluminium body. Simple pressure exerted on the long lever makes the unpinning of all types of chain easy.



Code	Description	Pcs per pack
4180180	Chain breaker	1
4180720	Spare punch Ø 6 mm	1

Bench drawing tool

Heat-treated aluminium body. Steel inserts to withstand prolonged use. Provided with a special bearing to render drawing soft and resistant.



Code	Description	Pcs per pack
4180200	Drawing tool	1
4180600	Spare insert head A	1